

DPU3022POE


Two Doors (In only) Networked Controller



- Power over Ethernet
- Wiegand & RS485 Reader compatible
- Supervisor for all inputs
- Master & Slave Card



Power Over Ethernet

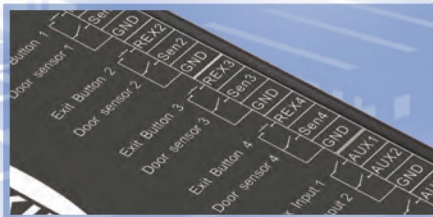



Supervisor



Wiegand & RS485 Reader compatible

Secured Operation:

-  RS485 Reader: Supports RS485 for every door, encrypted data instead of open Wiegand data
-  Multi Recognition Mode: Confirmed by Centre, Master & Slave Card, Groups Card










Engineered by KEYKING TECH LABS ISRAEL
Add: HaMasger 7, OR-YEUDA. 6022307, ISRAEL
Tel: +972-3-6358025 Fax: +972-3-6358071
E-mail: israel@keyking.net







The key To Your Peace of Mind...

Features

-  **Ultra Performance**
- 1:100,000 matches in 0.1 second
-  **Whole Wiegand Signal Compatible**
- Compatible with all Wiegand reader formats from 24 to 72 Bits
-  **RS485 Reader**
- Supports 4 pcs RS485 Reader through built-in RS485 bus
-  **Power over Ethernet**
- Power supply through a single CAT5/6 wiring
-  **Flow Control**
- Flexible programmable flow control between inputs and outputs
-  **Confirmed by Centre**
- Special option feature for high security field, such as Money Warehouse, Prison...
- Valid card will open the door only after confirmed by centre
-  **Master & Slave Card**
- Only a group of Master & Slave Card will open the door in Master & Slave door status
- Each card can be a matched Master card


Specifications

CPU	32 bits ARM® Cortex-M4 Processor
Cardholder Capacity	100,000 credentials
Log Capacity	200,000
Communication	TCP/IP 100MBPS Auto Sensing RS485,9600Bps
POE	803.11af
Reader Socket	Wiegand & RS485 Bus
Reader Amount	2 pcs Wiegand or RS485, combined
Inputs	2 REX exit buttons, 2 Door sensors
Aux Input	4
Aux Output	2 pcs, Dry Contact
Operating Temp	- 20°C ~ 65°C
Operating Voltage	12vDC, 200mA (Controller only) 12vDC, 2A (Reader connected)
Dimensions(mm)	W123 x H214 x D33 W384 x H403 x D72 (Cabinet)
Certification	CE, FCC, RoHS

-  **Severals Groups Cards**
- Only several groups cards will open the door in Groups Card door status
- Up to 4 groups cards can be configured
-  **On-Line and Off-Line seamless operation**
- On-Line: connected to server; Off-Line: Stand-Alone, not connected to server

System Configurations

Network

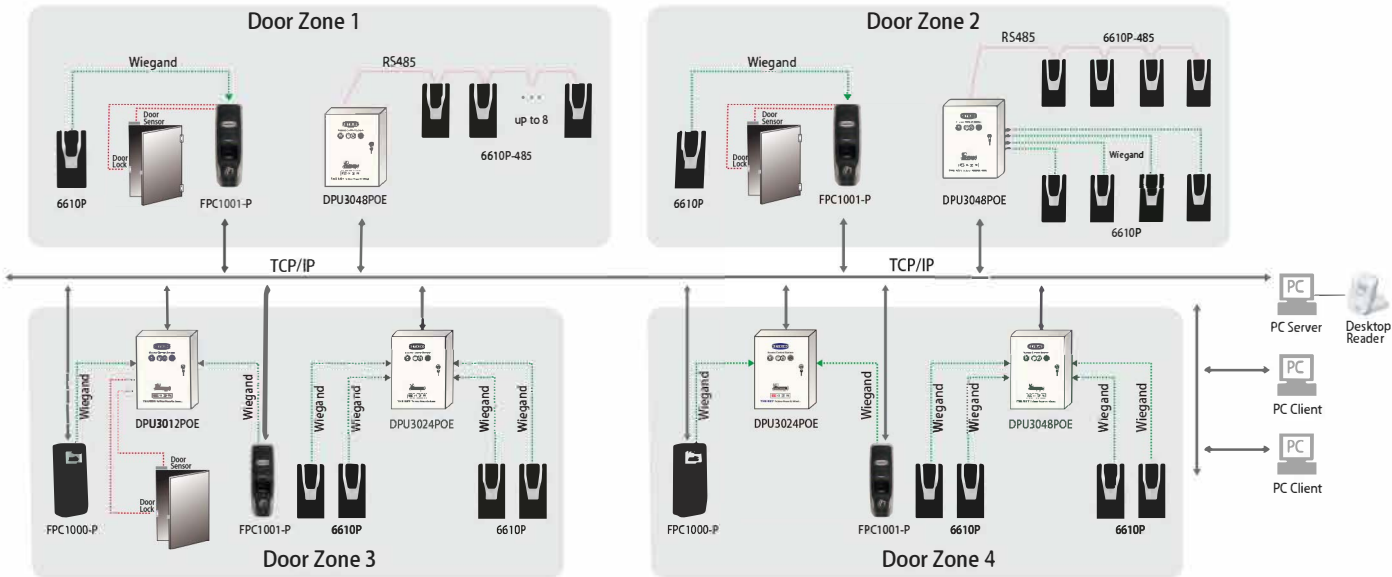

Head Quarters (Keyking Hongkong)

Add: 3F, HongKong Trade CTR, 161-167 DES Voeux RD Central, HongKong
E-mail: info@keyking.net <http://www.keyking.net>
Tel: +852-5569 0622

©2017 Keyking Group. Keyking and identifying product names and numbers herein are registered trade marks of Keyking. All non-Keyking brands and product names are trademarks or registered trademarks of their respective companies. Product appearance, build status and/or specifications are subject to change without notice.

