



GRL125
(Traffic Lights)

Features

- Low power consumption, large viewing angle and long life
- Visible distance long
- Multiple seals, waterproof
- Novel structure and beautiful appearance
- Unique optical system with uniform Chroma
- GB/14887-2003 and relevant international standards


Description

The red and green traffic lights are very versatile. They can be used on traffic roads, and can also be used in school teaching, parking lots, factories and other areas.

Specifications

- Light panel size: $\Phi 125\text{mm}$
- Dimensions : 420*200*220mm
- Number of beads : Red: 60, green: 60
- Voltage : AC220V
- Current: 0.4A
- power: $\leq 4.8\text{W}$
- power supply: Dedicated power supply
- LED brightness: R:4000-6000MCD,
G:10000-15000MCD
- Working temperature : -40° to $+50^{\circ}$
- humidity : 90%
- Visible distance: $\geq 300\text{m}$
- Perspective : 30°
- IP rating: IP53
- Light source life : 100000h
- housing: Cold rolled sheet
- control method: Multiple control methods

Wiring

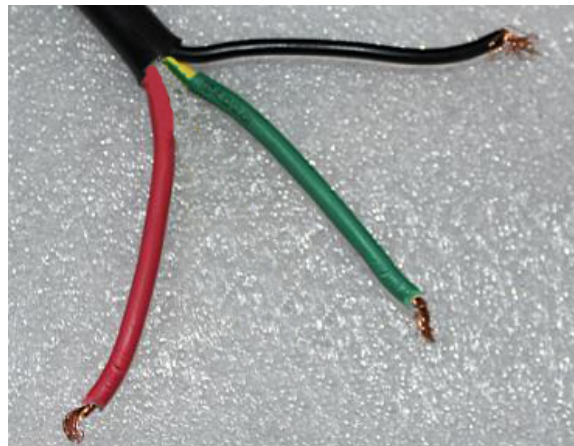

Black: neutral wire
Red: live wire of Red light
Green: live wire of Green light